



**NANO  
PROTECH**

**CYCLE**

# NO SWEAT


HIGH PERFORMANCE WATER DISPERSING 'PROTECT AND LUBRICATE' BIKE SPRAY USING THE LATEST **NANOTECHNOLOGY**



## The Lubrication Test: monitoring scar diameter

Levels of wear: the lower the number, the more effective the lubricant

Sample Name	Test	Results	Method
Nanoprotech Cycle	Mean wear scar diameter	0.46	ASTM D4172-94
Muc-Off Dry Lube	Mean wear scar diameter	1.34	ASTM D4172-95
GT85	Mean wear scar diameter	0.72	ASTM D4172-96

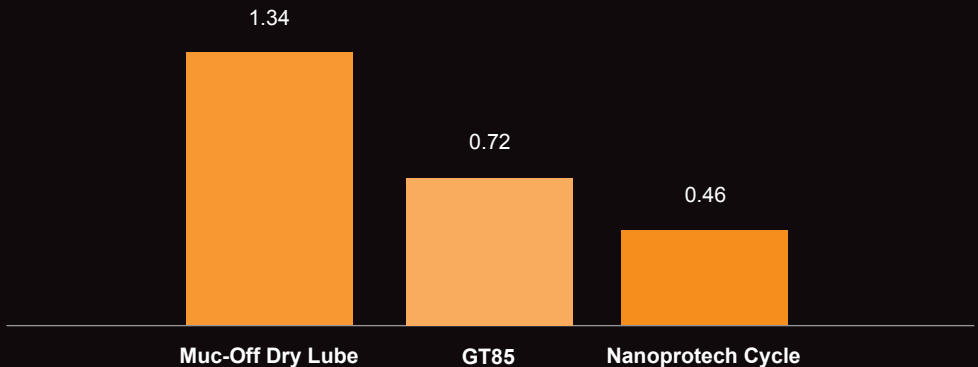

UK accredited laboratory test report number T20130710-0714 ASTM D4172 4-ball wear test